


FEATURES

- Native BACnet Compatibility
- BACnet IP/MSTP Router
- 4 Port RS 485 Repeater
- Automatic Data Transfer between IP and MSTP
- Easy setup via web page
- Distributive communication legs for easier network troubleshooting
- Multiple Baud Rates
- USB Service port
- Universal power supply

BLINK-R BACnet Router

The OPEN General BLINK-R is a BACnet IP/MSTP router with on board RS-485 Repeater. It automatically transfers BACnet data from BACnet/IP to BACnet/MSTP. It is a plug and play device with easy network setup via simple web browser.

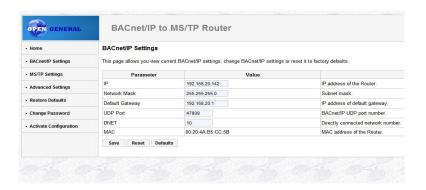

The BLINK-R conveniently has built in 4 port RS-485 repeater to repeat communication signals. It accommodates distributive communication leg design for easier network troubleshooting. It supports multiple baud rates, selectable via simple dip switch. A USB service port is on board for network analysis.

BLINK-R SPECIFICATIONS	
Communication	BACnet/IP, BACnet/MSTP 127 Max Nodes Baud Rates: 9600,19200,38400, 76800 Baud MSTP Media: Twisted shielded pair
Electrical	Voltage: 24 VAC 50/60 HZ, 12-36 VDC
Mechanical	Operating Environment: -30C to 62C, 10-95% RH Size: 11H x 105w x 40d mm Weight: 178 Grams Mounting: Din Rail (EN50022) Connectors: Removable connector
Agency Listing	C